

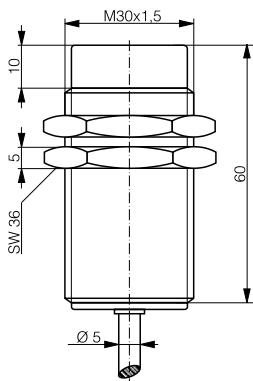



HOUSING	OPERATING DISTANCE	MOUNTING	✓ Long sensing range ✓ Outstanding accuracy and temperature stability ✓ Resolution in $\mu\text{m}$ range	✓ Exceptional price-performance ratio ✓ Current or voltage output ✓ IP67
M30	40 mm	Non-embeddable		




DW-AD-519-M30-390

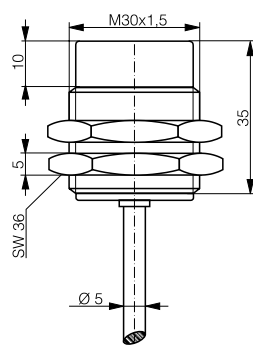

DW-AD-519-M30-320

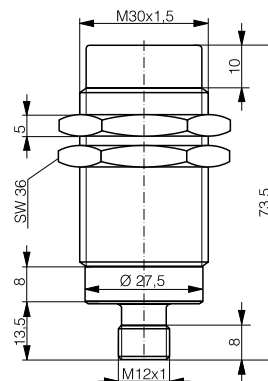

DW-AS-519-M30-390

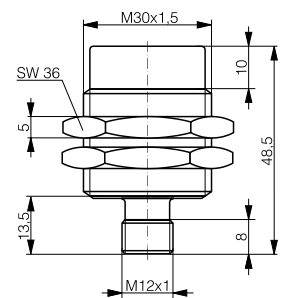

DW-AS-519-M30-320

DETECTION DATA		INTERFACE	
Sensing distance ( $S_d$ )	40 mm	IO-Link	✗
Repeat accuracy *	$\pm 0.35$ mm	MTTF (@40°C)	546 y
Static resolution* (@0.67· $S_d$ )	$\leq 1.42$ $\mu\text{m}$		
Dynamic resolution** (@0.67· $S_d$ )	$\leq 5.5$ $\mu\text{m}$		
Temperature drift on output signal***	$\leq \pm 10\%$		
Standard target	120 x 120 x 1 mm <sup>3</sup> , FE360		

\*Measured under 3 $\sigma$  confidence level (99.7%) at 0.67  $S_d$ , constant temperature and constant voltage supply.

\*\*Static resolution is measured filtering the signal at 20 Hz. Dynamic resolution is measured filtering the signal at 1 kHz.

\*\*\*Over time a temperature drift of up to 10% can occur on the sensor, so regular calibration is recommended, depending on the application.

ELECTRICAL DATA		MECHANICAL DATA	
Supply voltage range ( $U_B$ )	15...30 VDC	Mounting	Non-embeddable
Residual ripple	$\leq 20\%$ $U_B$	Housing material	Chrome-plated brass
Power consumption (no-load)	$\leq 12$ mA	Sensing face material	PBTP
Max. load at voltage output	$\leq 15$ mA	Max tightening torque	70 Nm
Max. load at current output	0.4k $\Omega$ ( $U_B=15V$ ) / 1k $\Omega$ ( $U_B=30V$ )	Ambient operating temperature	-25...+70°C
Bandwidth	100 Hz	Enclosure rating	IP67
Time delay before availability	20 ms	Weight (cable / connector)	see page 2
Recovery time	10 ms	Shock and vibration	IEC 60947-5-7
Warm-up time (temperature stability)	5 min		
Short-circuit protection	✓		
Voltage reversal protection	✓		
Cable length max.	$\leq 300$ m		

Note: all data measured according to IEC 60947-5-2 standard with  $U_B=20 \dots 30VDC$ ,  $T_A=23^\circ C \pm 5^\circ C$ .


## CORRECTION FACTORS

Steel FE 360	1	Copper	0.4	Aluminum	0.44	Brass	0.49	Stainless S. V2A 1 / 2 mm	0.76
--------------	---	--------	-----	----------	------	-------	------	---------------------------	------

Note: the operating distance of the sensor must be multiplied by the correction factor of the material. For example, the operating distance on Aluminum is  $S_{n,Al} = S_n \times CF_{Al}$ . In case of embeddable mounting, the distance is multiplied by the additional correction factor of the support, thus  $S_{n,Al} = S_n \times CF_{Al} \times CF_{emb,Al}$ .

## INSTALLATION CONDITIONS

## RESPONSE DIAGRAM

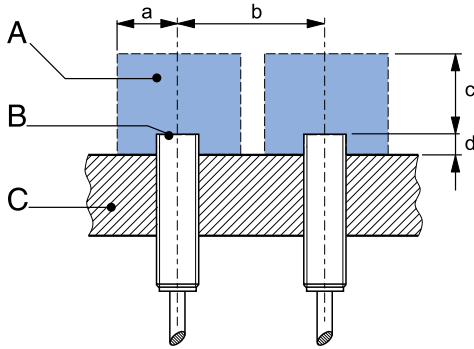


A : metal free zone  
B : sensing face  
C : support

a : 55 mm  
b : 150 mm  
c : 120 mm


d : steel 35 mm  
alu 25 mm  
brass 25 mm  
stainless steel 20 mm

Note: additional installation information can be found in the glossary of the Contrinex General Catalog.

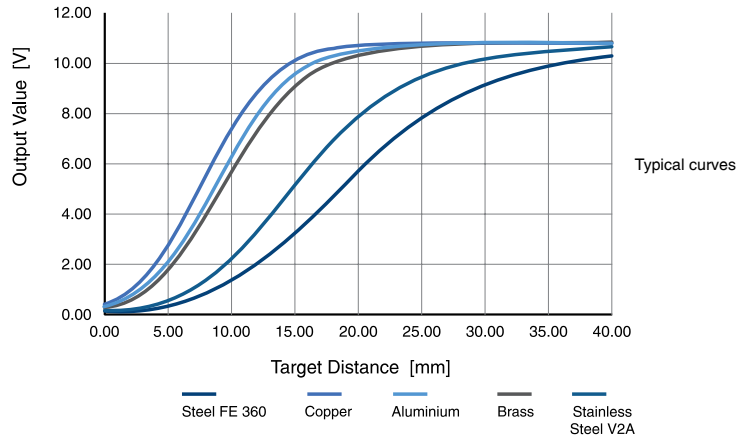


Output voltage	$s = 0$	0 V / -0.0 +0.4 V	Output current	$s = 0$	4 mA ± 0.8 mA
	$s = S_d/2$	+5.2 V ± 0.4 V		$s = S_d/2$	12.3 mA ± 0.8 mA
	$s = S_d$	+10.0 V ± 0.4 V		$s = S_d$	20 mA ± 0.8 mA
	$s > 3 \cdot S_d$	10.4 ± 0.2 V		$s > 3 \cdot S_d$	+20 ... 23 mA ± 0.8 mA

## WIRING DIAGRAM

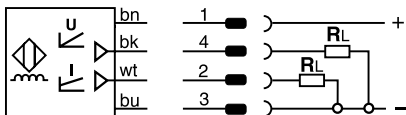

## PIN ASSIGNMENT



## AVAILABLE TYPES

Part number	Part reference	Connection	Output on pin 2 / wh	Output on pin 4 / bk	Weight
330-020-434	DW-AD-519-M30-320	PUR, 2 m, 4 wire	4...20 mA	0...10 V	190 g
330-020-435	DW-AD-519-M30-390	PUR, 2 m, 4 wire	4...20 mA	0...10 V	215 g
330-020-460	DW-AS-519-M30-320	M12 4-pin	4...20 mA	0...10 V	135 g
330-020-461	DW-AS-519-M30-390	M12 4-pin	4...20 mA	0...10 V	155 g

Note: part reference may include additional suffix to indicate a revision version or special version. Further information is available on request.

Product warranty is contingent upon professional use and proper installation of the product in applications for which the product was intended for, namely systems of automated manufacturing processes (factory automation). The warranty does not cover products that were modified, that have expired or that were subjected to physical, environmental, chemical or electrical stress beyond their original design specifications. This product is not a safety component as defined by IEC-61508, ISO 13489 or other international safety standards. The manufacturer does not guarantee product performance in specific applications and does not warrant specifications in case of significant recurring temperature cycling. Terms of delivery and rights to change design reserved. All rights reserved.